

MOISTURE TOLERANT PRODUCTS

ATLAS® GC PRIMER *REZKLAD® E-CONCRETE PRIMER MT* *RED FURNANE® SETTING BED MT*

Moisture in concrete, it is always a factor. Whether it is a new pour or an existing slab, it seems to be a problem on most jobs.

Not any more. ATLAS has developed a series of products to eliminate the concern.

ATLAS® GC PRIMER

- Can be used on “**GREEN CONCRETE**” and existing concrete.
- Is a primer, primer sealer or concrete curing compound.
- Meets ASCM C309 requirements for use as a concrete curing compound.
- Can be applied to concrete without any surface preparation up to 36 hours after finishing (after 36 hours grit blasting is required).
- Does not need to be removed prior to further treatment.
- Can be brush, roller or spray applied.
- Is compatible with all ATLAS epoxy setting beds, coatings, linings, and floor topping systems.

REZKLAD® E-CONCRETE PRIMER MT


- Can be used on **new concrete after 5 days cure time**.
- Can be used on **existing damp concrete, simply remove standing water**.
- Can be brush or roller applied.
- Requires grit blasting or acid washing surface prep in order to achieve a tenacious bond.
- Is a primer compatible with all ATLAS epoxy setting beds, coatings, linings, and floor topping systems.

RED FURNANE® SETTING BED MT

- Is a trowel applied setting bed or bond coat for floor tile, pavers and brick.
- Can be used on **new concrete after 5 days cure time**.
- Can be used on **existing damp concrete, simply remove standing water**.

Technical Data Sheets on all three products are available at www.atlasmin.com

For additional information, please contact our area representative or Atlas Headquarters at 800.523.8269

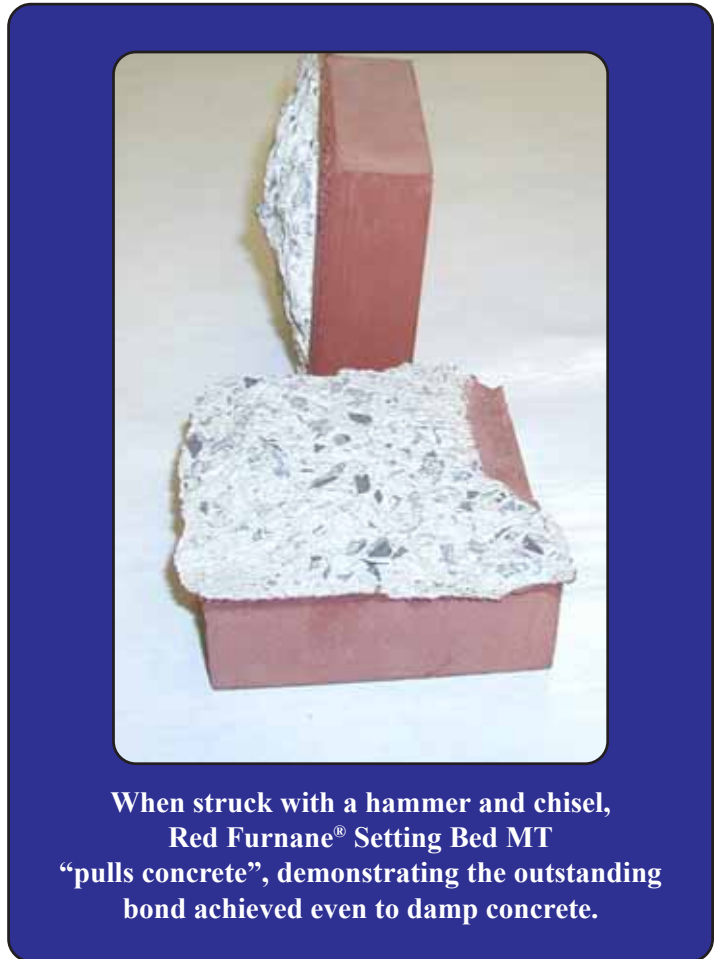

atlas

Atlas Minerals & Chemicals, Inc.
Mertztown, PA 19539 • E-mail: sales@atlasmin.com